

Aprisa FE


Secure, narrow channel, point-to-point Ethernet radio ETSI licensed bands



Smart, cost effective, narrow channel, point-to-point Ethernet radio for low capacity linking and backhaul of DMR and industrial monitoring and control

New technologies, such as digital land mobile radio, need IP connectivity while cyber security concerns are driving the need for protected operation as standard even in low end applications. Aprisa FE introduces cost effective, secure IP over Ethernet linking, while utilising the industry proven VHF and UHF licensed bands – the mainstay for lower capacity linking and backhaul for public safety, transport and utility industries globally.

- **High capacity:** delivering an industry leading combination of capacity and distance the Aprisa FE provides data rates of up to 216 kbit/s in 50 kHz licensed channels.
- **Advanced IP connectivity:** selectable L2 Bridge or L3 Router modes, with VLAN, QoS and filtering attributes to support narrow bandwidth channels and mission critical traffic while meeting increasing security and IP network policy requirements.
- **Secure:** with its defence in depth approach, including AES encryption, authentication, L2 / L3 address filtering and L4 port application filtering and user access control, the Aprisa FE protects against vulnerabilities and malicious attacks.
- **Link efficiency:** adaptive modulation and forward error correction maintains the integrity of the wireless connection to ensure maximum capacity delivered continuously under varying atmospheric conditions.
- **Reliable and robust:** incorporating 4RF standard distance engineering RF design techniques, Aprisa FE maintains its high power output and performance over a wide temperature range without de-rating, delivering robust performance and long term reliability.
- **Easily managed:** an easy to use GUI supports full management of both local and remote terminals via HTTPS, and SNMP support allows network-wide monitoring and control via a third party network management system.

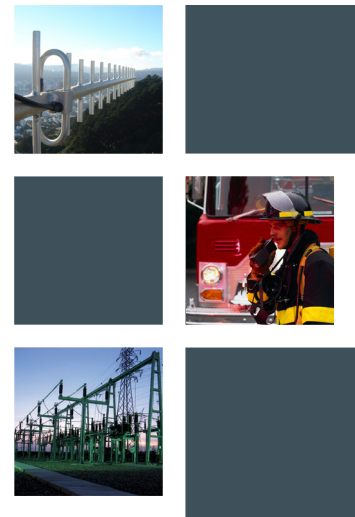

The Aprisa FE in brief

- Licensed narrow channel point-to-point Ethernet radio
- VHF and UHF licensed bands
- Ethernet – 4 port Layer 2 and 3
- Software selectable 12.5 kHz, 25 kHz, 50 kHz channel sizes
- Gross data rates up to 216 kbit/s
- Full duplex operation
- Internal and external pass band duplexer options
- 256, 192 or 128 bit AES encryption
- Adaptive coding and modulation: QPSK to 64 QAM
- Advanced forward error correction
- Dedicated alarm port
- Protected station option
- -40 to +60 °C operational temperature
- 434 mm (W) x 295 mm (D) x 44.45 mm (H) (dependent on duplexer type)
- RED and ACMA standards compliant

Aprisa FE applications

Low cost, low capacity, digital mobile radio base station backhaul:

- Mid-tier public safety, first responders
- Taxis, buses and public transport
- Construction, mining and utility service vehicles
- Backhaul for third party RoIP (radio over IP linking) legacy analog adapters
- ETSI DMR, Motorola MOTOTRBO™ IP Site Connect systems, TaitNet™ DMR, NXDN™ Conventional IP link applications

Remote control, monitoring and site security applications throughout a range of public safety, critical infrastructure and utility industries:

- SCADA point-to-multipoint radio base station to master station linking
- AMI / AMR high density data concentrator backhaul
- Renewables monitoring and disconnect
- Traffic management and electronic sign telemetry
- Agriculture and weather station linking
- Site security alarms, tower management, remote transmitter shutdown
- Low-rate high resolution CCTV and automatic number plate reader backhaul (ANPR)

Motorola and MOTOTRBO are trademarks of Motorola Solutions, Inc
Tait and TaitNet are trademarks of Tait Ltd
NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation

SYSTEM SPECIFICATION

GENERAL				
NETWORK TOPOLOGY	Point-to-point			
NETWORK INTEGRATION	Ethernet			
PROTOCOLS				
ETHERNET	IEEE 802.3, 802.1Q, 802.1p			
WIRELESS	Proprietary			
RADIO				
	FREQ BAND	TUNING RANGE	TUNE STEP	
FREQUENCY RANGE	135 MHz	135 – 175 MHz	0.625 kHz	
	320 MHz	320 – 400 MHz	6.25 kHz	
	400 MHz	400 – 470 MHz	1.25 kHz	
	450 MHz	450 – 520 MHz	6.25 kHz	
CHANNEL SIZE	12.5 kHz, 25 kHz and 50 kHz software selectable			
DUPLEX	Dual frequency full-duplex			
FREQUENCY STABILITY	320 MHz \pm 1.0 ppm 135 / 400 / 450 MHz \pm 0.5 ppm			
FREQUENCY AGING	< 1 ppm / annum			
TRANSMITTER				
MAX PEAK ENVELOPE POWER (PEP)	7.9 W (+39 dBm)			
AVERAGE POWER OUTPUT	64 QAM 0.01 – 1.6 W (+10 to +32 dBm, in 1 dB steps) 16 QAM 0.01 – 2.0 W (+10 to +33 dBm, in 1 dB steps) QPSK 0.01 – 3.2 W (+10 to +35 dBm, in 1 dB steps)			
ADJACENT CHANNEL POWER	< –60 dBc			
TRANSIENT ADJACENT CHANNEL POWER	< –60 dBc			
SPURIOUS EMISSIONS	< –37 dBm			
RECEIVER				
		12.5 kHz	25 kHz	50 kHz
SENSITIVITY (BER < 10 ⁻⁹)	max coded 64 QAM	–101 dBm	–97 dBm	–94 dBm
	max coded 16 QAM	–108 dBm	–105 dBm	–102 dBm
	max coded QPSK	–113 dBm	–110 dBm	–107 dBm
ADJACENT CHANNEL SELECTIVITY		> –45 dBm	> –35 dBm	> –35 dBm
	(Note 1)	[> 48 dB]	[> 58 dB]	[> 58 dB]
CO-CHANNEL REJECTION max coded QPSK	> –10 dB			
CO-CHANNEL REJECTION max coded 64 QAM	> –20 dB			
INTERMODULATION RESPONSE REJECTION	> –33 dBm [$>$ 60 dB Note 1]			
BLOCKING OR DESENSITISATION	> –15 dBm [$>$ 78 dB Note 1]			
SPURIOUS RESPONSE REJECTION	> –30 dBm [$>$ 63 dB Note 1]			
MODEM				
		12.5 kHz	25 kHz	50 kHz
GROSS DATA RATE	64 QAM	60 kbit/s	120 kbit/s	216 kbit/s
	16 QAM	40 kbit/s	80 kbit/s	144 kbit/s
	QPSK	20 kbit/s	40 kbit/s	72 kbit/s
FORWARD ERROR CORRECTION	Concatenated Reed Solomon plus variable coding rate convolutional code			
ADAPTIVE BURST SUPPORT	Adaptive FEC Adaptive modulation			
DUPLEXER				
	MOUNTING	PASS BAND	TX / RX SPLIT	FREQUENCY BANDS
	External	0.5 MHz	\geq 4.6 MHz	135 MHz
	Internal / External (+1U)	0.5 MHz	\geq 5.0 MHz	320, 400 MHz
	Internal / External (+1U)	2.0 MHz	\geq 9.45 MHz	320, 400 MHz
	External	0.5 MHz	\geq 5.0 MHz	450 MHz

SECURITY		
DATA ENCRYPTION	256, 192 or 128 bit AES	
DATA AUTHENTICATION	CCM	
INTERFACES		
ETHERNET	4 port RJ45 10/100Base-T switch	
MANAGEMENT	1 x USB micro type B (device port) 1 x USB standard type A (host port) 1 x Alarm port RJ45	
ANTENNA	1 x N-type Female 50 ohm	
LEDs	Status: OK, MODE, AUX, TX, RX Diagnostics: RSSI, traffic port status	
RSSI BUTTON	Toggles LEDs between RSSI test / product status	
PRODUCT OPTIONS		
PROTECTED STATION	Providing hot-swappable / hot-standby redundant hardware switching (13.8 VDC or 48 VDC)	
POWER		
INPUT VOLTAGE	10 – 30 VDC (13.8 V nominal)	
RECEIVE	All bands except 320 MHz	< 3 W
	320 MHz	< 7 W
TRANSMIT	135 MHz	< 26 W
	320 MHz	< 35 W
	400 and 450 MHz	< 28 W
MECHANICAL		
DIMENSIONS	Radio	434 mm (W) x 295 mm (D) x 44.45 mm (H) 1 RU 17.1" (W) x 11.6" (D) x 1.75" (H)
	Protected Station	434 mm (W) x 372 mm (D) x 88.9 mm (H) 2 RU 17.1" (W) 14.6" (D) 3.5" (H)
WEIGHT	5.0 kg (11.3 lbs) (dependant on duplexer type)	
MOUNTING	Rack mount 19" 1U high (internal duplexer)	
ENVIRONMENTAL		
OPERATING TEMPERATURE	–40 to +60 °C (–40 to +140 °F)	
HUMIDITY	Maximum 95 % non-condensing	
MANAGEMENT & DIAGNOSTICS		
LOCAL ELEMENT	Web server with full control / diagnostics Partial diagnostics via LEDs and test button Software upgrade from PC or USB flash drive	
REMOTE ELEMENT	Over-the-air remote element management with control / diagnostics	
NETWORK	SNMPv2 and SNMPv3 security support for integration with external network management systems	
COMPLIANCE		
RF	12.5 kHz	EN 300 113
	25 kHz and 50 kHz	EN 302 561
EMC	EN 301 489-1 and 5	
SAFETY	EN 60950	
ENVIRONMENTAL	ETS 300 019 Class 3.4	

Notes:

- The receiver figures are shown in typical fixed interference dBm values and dB values [in brackets] relative to the sensitivity. Relative values are given for QPSK modulation and max coded FEC. Refer to the Aprisa FE User Manual for a complete list of modulation and coding levels.

ABOUT 4RF

Operating in more than 140 countries, 4RF provides radio communications equipment for critical infrastructure applications. Customers include utilities, oil and gas companies, transport companies, telecommunications operators, international aid organisations, public safety, military and security organisations. 4RF point-to-point and point-to-multipoint products are optimized for performance in harsh climates and difficult terrain, supporting IP, legacy analogue, serial data and PDH applications.

Copyright © 2017 4RF Limited. All rights reserved. This document is protected by copyright belonging to 4RF Limited and may not be reproduced or republished in whole or part in any form without the prior written consent of 4RF Limited. While every precaution has been taken in the preparation of this literature, 4RF Limited assumes no liability for errors or omissions, or from any damages resulting from the use of this information. The contents and product specifications within it are subject to revision due to ongoing product improvements and may change without notice. Aprisa and the 4RF logo are trademarks of 4RF Limited.



For more information please contact
EMAIL sales@4rf.com
URL www.4rf.com

Version 1.5.0